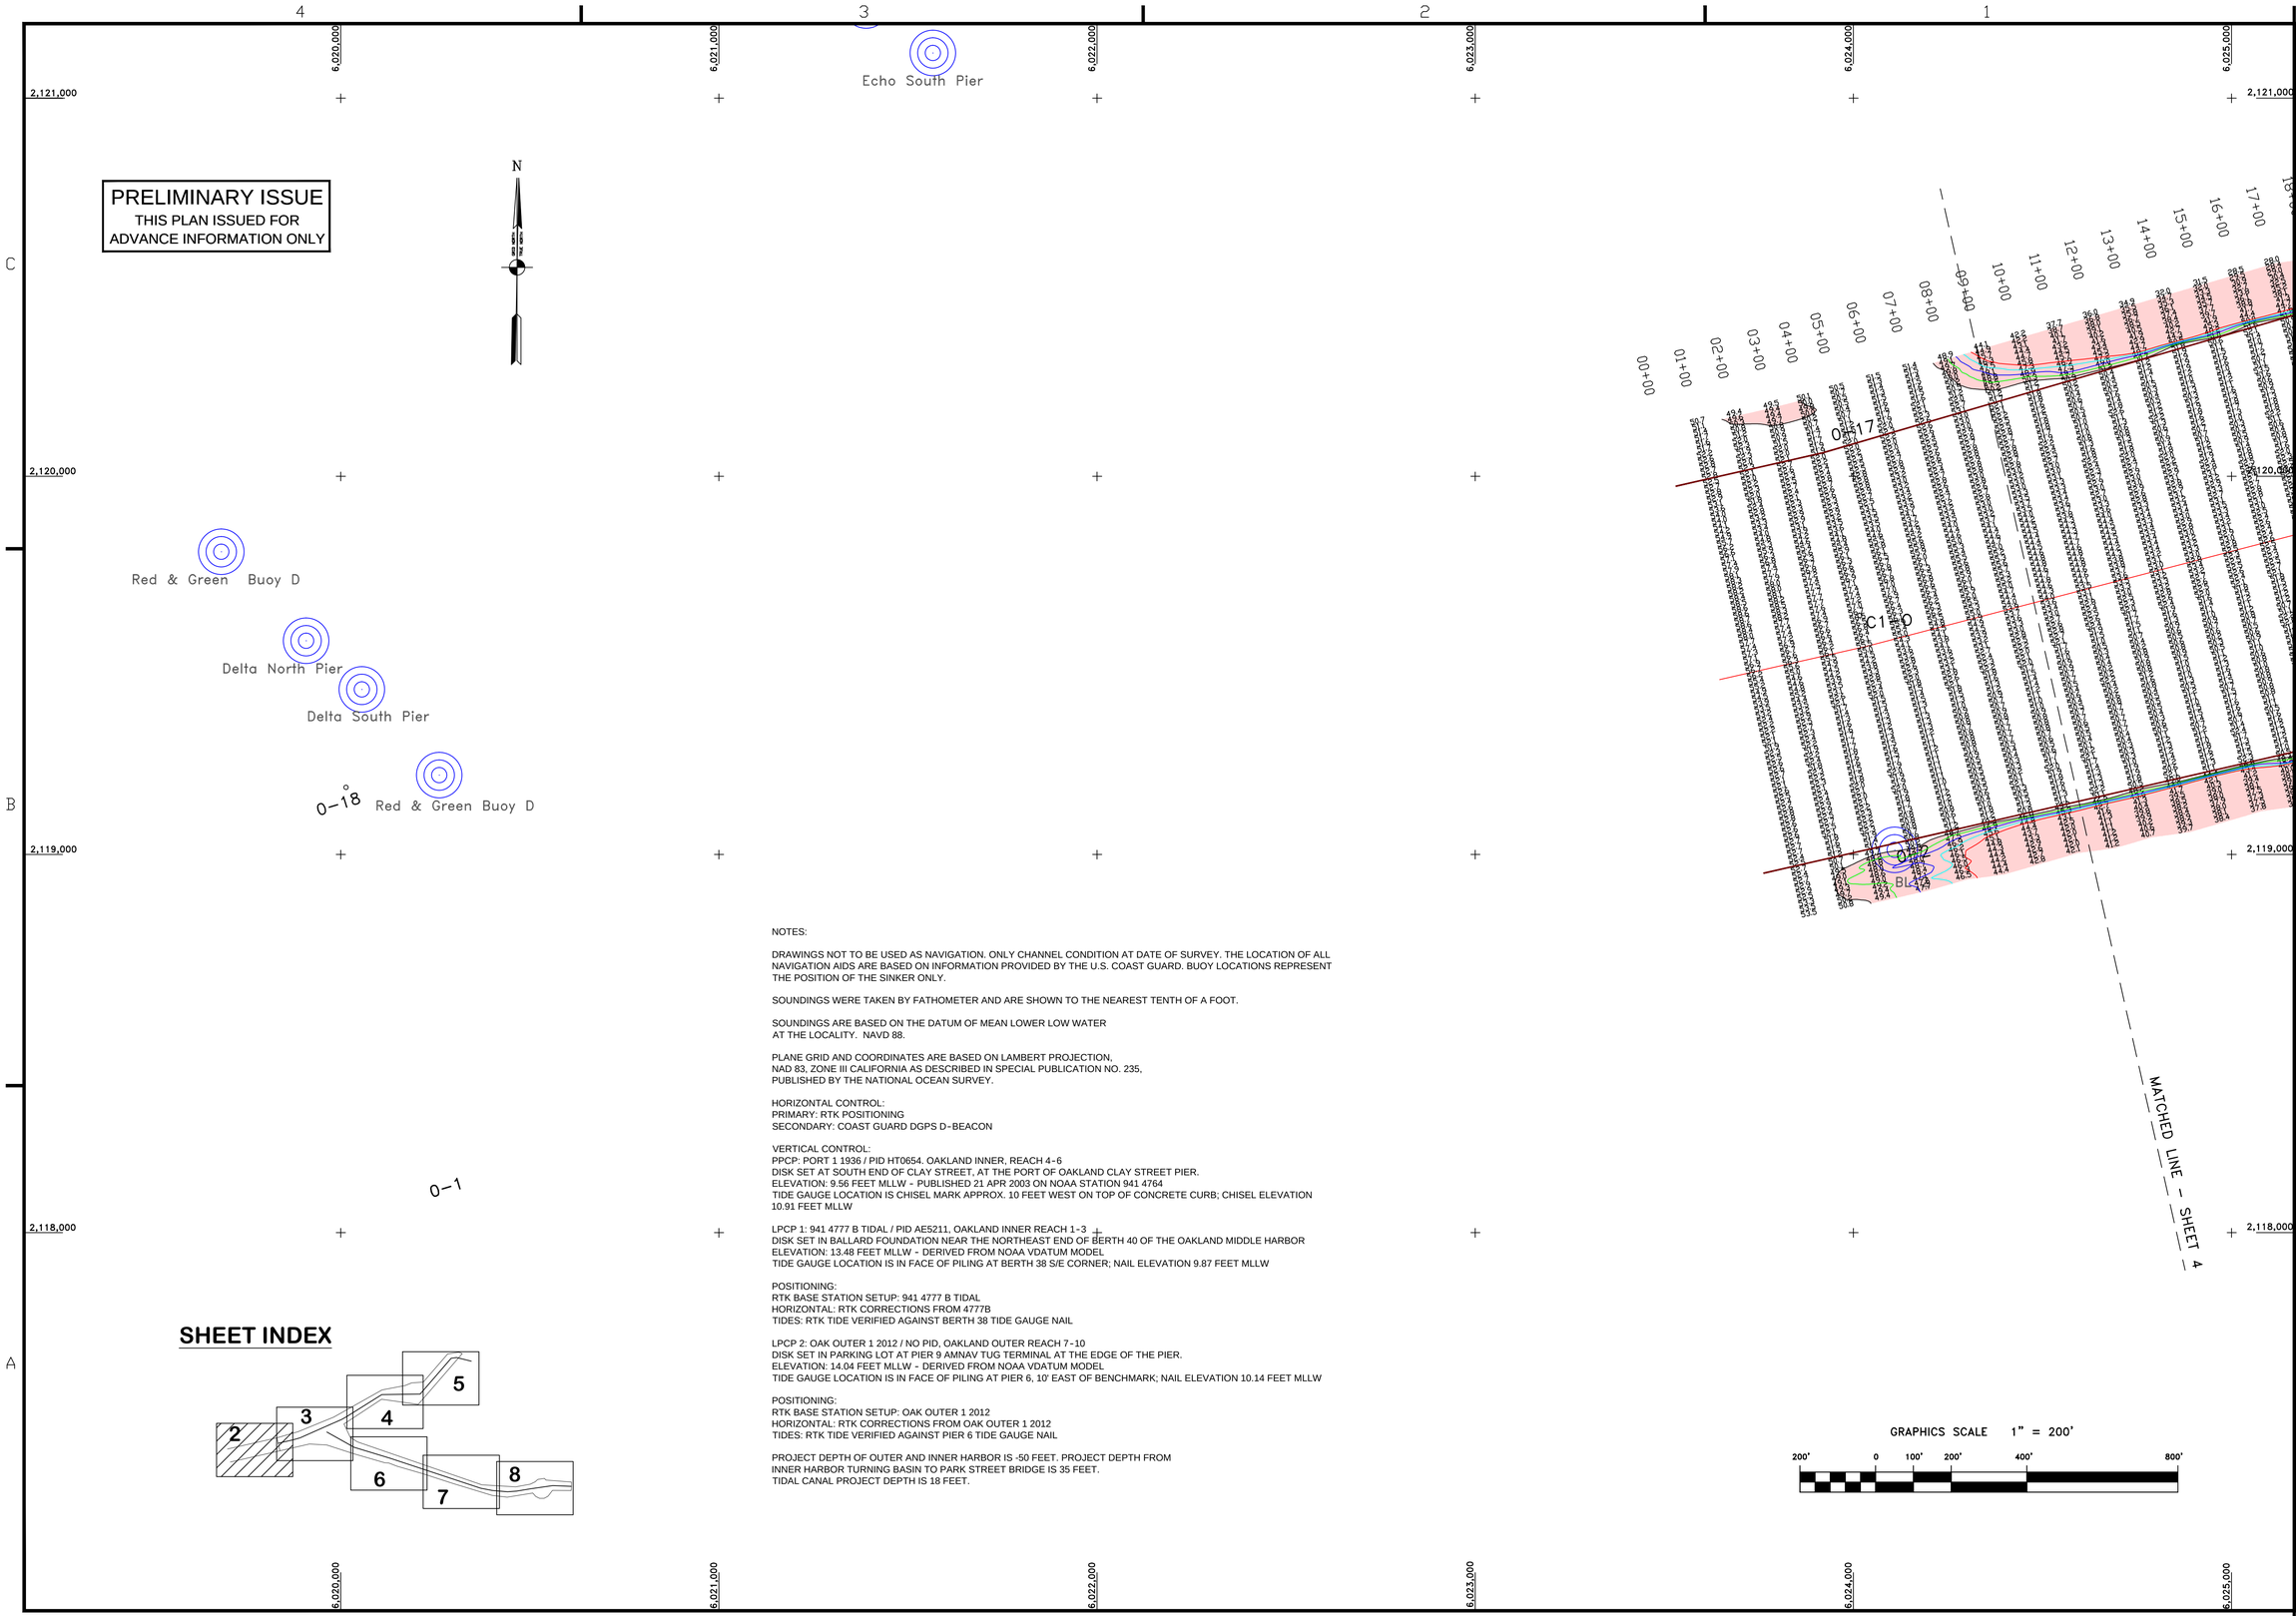

NOTES:

DRAWINGS NOT TO BE USED AS NAVIGATION. ONLY CHANNEL CONDITION AT DATE OF SURVEY. THE LOCATION OF ALL NAVIGATION AIDS ARE BASED ON INFORMATION PROVIDED BY THE U.S. COAST GUARD. BUOY LOCATIONS REPRESENT THE POSITION OF THE SINKER ONLY.

SOUNDINGS WERE TAKEN BY FATHOMETER AND ARE SHOWN TO THE NEAREST TENTH OF A FOOT.

SOUNDINGS ARE BASED ON THE DATUM OF MEAN LOWER LOW WATER
AT THE LOCALITY. NAVD 88.

PLANE GRID AND COORDINATES ARE BASED ON LAMBERT PROJECTION,
NAD 83, ZONE III CALIFORNIA AS DESCRIBED IN SPECIAL PUBLICATION NO. 235,
PUBLISHED BY THE NATIONAL OCEAN SURVEY.

HORIZONTAL CONTROL:
PRIMARY: RTK POSITIONING
SECONDARY: COAST GUARD DGPS D-BEACON

VERTICAL CONTROL:
PPCP: PORT 1 1936 / PID HT0654. OAKLAND INNER, REACH 4-6
DISK SET AT SOUTH END OF CLAY STREET, AT THE PORT OF OAKLAND CLAY STREET PIER.
ELEVATION: 9.56 FEET MLLW - PUBLISHED 21 APR 2003 ON NOAA STATION 941 4764
TIDE GAUGE LOCATION IS CHISEL MARK APPROX. 10 FEET WEST ON TOP OF CONCRETE CURB; CHISEL ELEVATION 10.91 FEET MLLW

LPCP 1: 941 4777 B TIDAL / PID AE5211, OAKLAND INNER REACH 1-3
DISK SET IN BALLARD FOUNDATION NEAR THE NORTHEAST END OF BERTH 40 OF THE OAKLAND MIDDLE HARBOR
ELEVATION: 13.48 FEET MLLW - DERIVED FROM NOAA VDATUM MODEL
TIDE GAUGE LOCATION IS IN FACE OF PILING AT BERTH 38 S/E CORNER; NAIL ELEVATION 9.87 FEET MLLW

POSITIONING:
RTK BASE STATION SETUP: 941 4777 B TIDAL
HORIZONTAL: RTK CORRECTIONS FROM 4777B
TIDES: RTK TIDE VERIFIED AGAINST BERTH 38 TIDE GAUGE NAIL

LPCP 2: OAK OUTER 1 2012 / NO PID, OAKLAND OUTER REACH 7-10
DISK SET IN PARKING LOT AT PIER 9 AMNAV TUG TERMINAL AT THE EDGE OF THE PIER.
ELEVATION: 14.04 FEET MLLW - DERIVED FROM NOAA VDATUM MODEL
TIDE GAUGE LOCATION IS IN FACE OF PILING AT PIER 6, 10' EAST OF BENCHMARK; NAIL ELEVATION 10.14 FEET MLLW

POSITIONING:
RTK BASE STATION SETUP: OAK OUTER 1 2012
HORIZONTAL: RTK CORRECTIONS FROM OAK OUTER 1 2012
TIDES: RTK TIDE VERIFIED AGAINST PIER 6 TIDE GAUGE NAIL

PROJECT DEPTH OF OUTER AND INNER HARBOR IS -50 FEET. PROJECT DEPTH FROM
INNER HARBOR TURNING BASIN TO PARK STREET BRIDGE IS 35 FEET.
TIDAL CANAL PROJECT DEPTH IS 18 FEET.

SHEET INDEX

US Army Corps of Engineers
San Francisco District
1455 Market Street
San Francisco, CA 94103

Mark	Description	Date	Appr.

DESIGNED BY:	CHECKED BY: TVW	DRAWN BY: EWC	
DATE: 2/5/2016	SHEET NO. 2 OF 8	DRAWING NO. 2	XXX

PREPARED UNDER THE DIRECTION OF
JOHN C. MORROW
LT. COLONEL, C.E., DISTRICT ENGINEER

SUBMITTED: MC
Hydro. Survey Team Leader
APPROVAL RECOMMENDED:
Chief, Technical Support Section
APPROVED:
Chief, Construction Branch

ALAMEDA COUNTY CALIFORNIA

OAKLAND HARBOR

REACH 1 POSTDREDGE SURVEY COMPOSITE
26 JAN & 3 FEB 2016
REACH 2 PROGRESS SURVEY COMPOSITE
23 DEC 2015 & 29 JAN 2016

Sheet reference number
C2